


## Compact Excavator Pipe-Rupture Valve

Series CFS

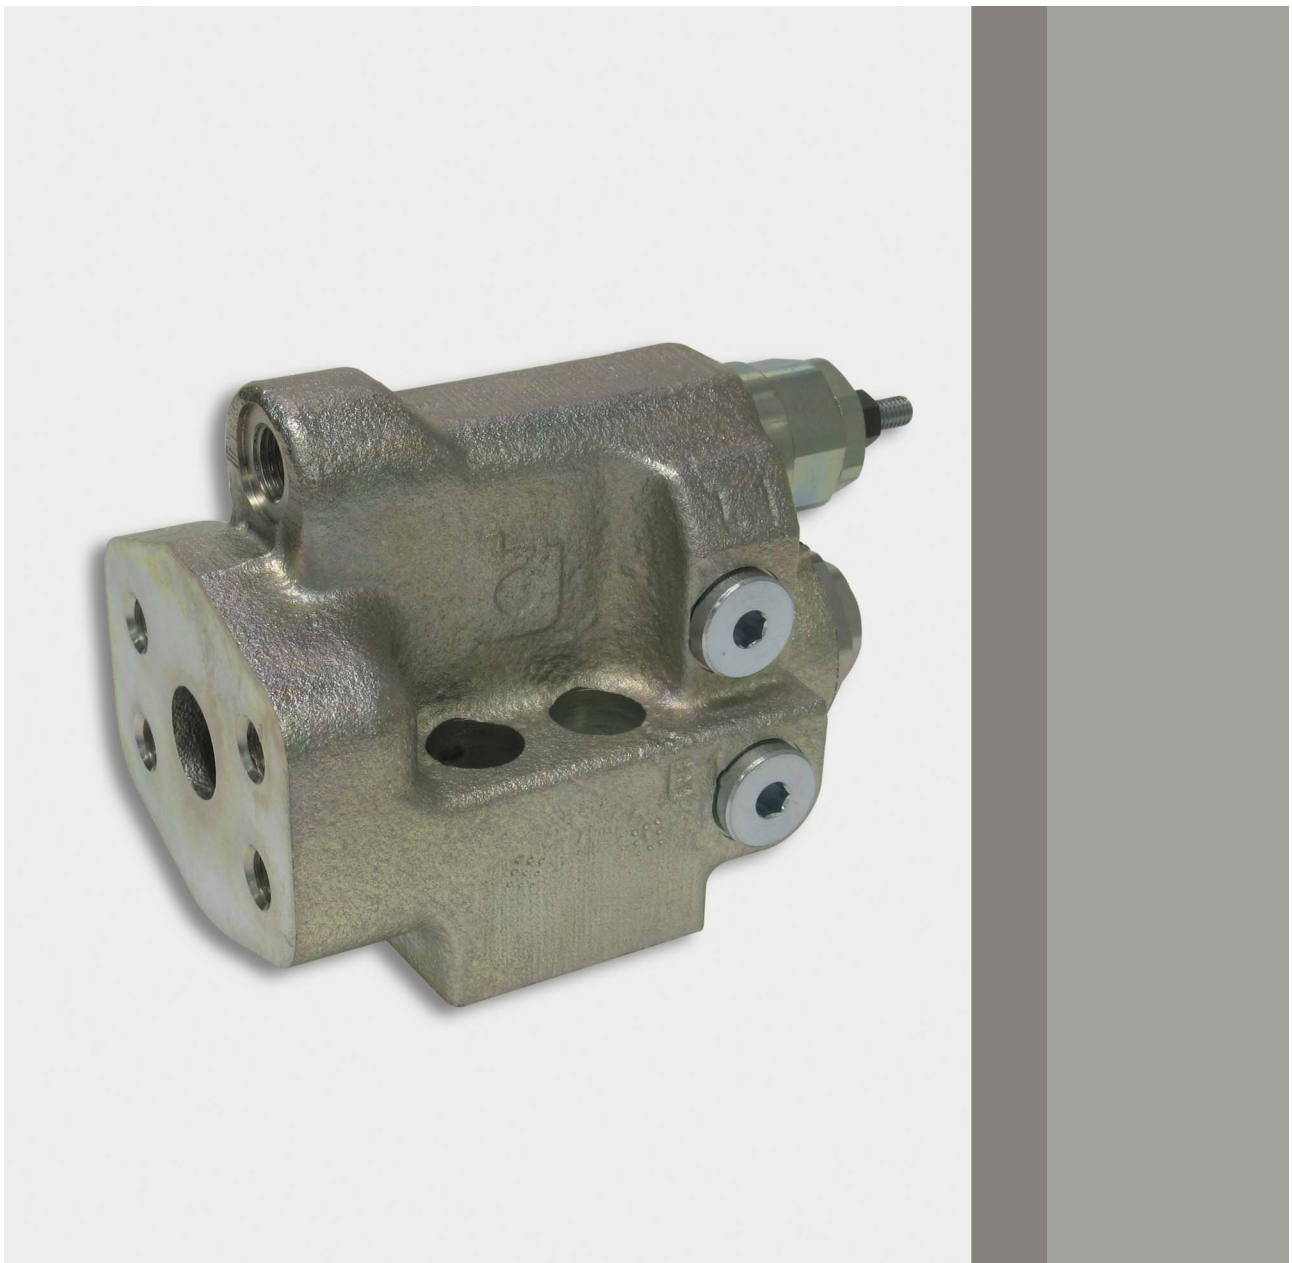

motion and progress

<b>Contents</b>	<b>Page</b>
<b>1 General description</b>	<b>3</b>
<b>2 Advantages</b>	<b>3</b>
<b>3 Application</b>	<b>3</b>
<b>4 Technical data</b>	<b>4</b>
<b>5 Installation/startup</b>	<b>5</b>
5.1 Installation information	5
5.2 Adjustment information	5
<b>6 Description of function</b>	<b>6</b>
<b>7 Port designations</b>	<b>8</b>
<b>8 Circuit example</b>	<b>8</b>
<b>9 Standard design, sizes 16/20</b>	<b>9</b>
9.1 Dimensions	9
9.2 Performance graphs	10
9.3 Model code key	11

## 1 General description

In accordance with standard EN 474-5 "Safety of earth-moving machinery - Requirements for hydraulic excavators", the excavator pipe-rupture valve, type CFS (**C**ompact **F**low Control and **S**afety Valve), prevents uncontrolled lowering of the actuator in the event of a pipe- or hose-rupture.

In addition, the CFS valve holds the actuator in its position when the main valve is centred. The valve also includes a secondary pressure relief function, which protects the actuator against overload.

## 2 Advantages

The inlet and actuator ports on the CSF excavator pipe-rupture valve are standard SAE flanged ports, and the valve can therefore be retrofitted to existing equipment without any difficulty.

Thanks to its load-independent, pilot-operated opening principle, variations in load pressure - even right up to the maximum - have no effect on the fine-control characteristics and the hydraulic performance of the valve. The design of the valve means that it can be operated by very small lowering pressures.

The CSF is set at the machine in a way that ensures that the excavator pipe-rupture function has no effect on the hy-

draulic values that have already been set in the machine (pre-opening principle). This means that excavators with and without a lifting function can be equipped with the same basic hydraulic system; the machines' work cycles remain unchanged.

The secondary pressure-relief function can handle the full rated flow. When the main spool valve is a closed-centre model and a secondary valve is connected in parallel, no pressure summing occurs. The secondary pressure-relief valve in the excavator pipe-rupture valve opens at exactly the opening pressure that has been set. There is no need for a large-bore, external tank return line.

## 3 Application

The excavator pipe-rupture valve is used wherever so required by the standards EN 474, ISO 8643 and DIN 24093 for excavators with a lifting device (e.g. a load hook on the bucket). The actuators concerned are the lift cylinder, the stick cylinder and the adjusting cylinder.

It is also possible to envisage machine applications in which a pipe-rupture on the actuators could produce dangerous situations e.g. machines for materials handling and demolition.



**Attention:** the excavator pipe-rupture valve may only be used for the purpose for which it has been designed!

## 4 Technical data

General characteristics	Description, value, unit
Design	2-stage proportionally-controlled seat valve, with initial hydraulic decompression patented follower principle
Mounting method	flange-mounting, SAE 6000 psi
Mounting attitude	unrestricted
Flow direction	A → B free flow through check valve B → A controlled flow
Weight	3.6 kg

Hydraulic characteristics	Description, value, unit
Nominal sizes	16 20
Nominal flow rate	size 16 = 250 l/min size 20 = 350 l/min
Pilot pressure range	opening pressure 4...12 bar (adjustable) full opening opening pressure + 18 bar + leakage oil pressure
Operating pressure	max. 420 bar
Secondary PRV - adjustment range	min. 320 ... 420 bar (max. up to 460 bar also possible); settings are sealed other models - consult Bucher Hydraulics
Operating fluid	mineral oil to DIN 51524 and DIN 51525 (HL/ HLP), other fluids - consult Bucher Hydraulics
Temperature range, seal material	<ul style="list-style-type: none"> <li>Nitrile = -20 °C ... +90 °C</li> <li>Viton = -20 °C ... +200 °C</li> <li>Low (N7T40) = -50 °C ... +80 °C</li> </ul>
Viscosity range	<ul style="list-style-type: none"> <li>minimum 2.8 mm<sup>2</sup>/s (cSt)... maximum 1500 mm<sup>2</sup>/s (cSt)</li> <li>recommended 10 mm<sup>2</sup>/s (cSt) ... 380 mm<sup>2</sup>/s (cSt)</li> </ul>
Filtration	NAS 1638 class 9, β <sub>10</sub> ≥ 75 ISO 4406 class 18/15 (valves do not have any internal filters)

Ports	Description, value, unit
SAE	to SAE J518 DEC87
Threads	to DIN 3852, Parts 1 and 2
Fittings	to ISO 8434-1

## 5 Installation/startup

### 5.1 Installation information



**Attention:** only trained and competent personnel may carry out any work on the excavator pipe-rupture valve!

The valve must not be opened without the manufacturer's express permission!

Mounting bolts can be supplied as an optional extra and are grade 12.9 to DIN 912, with "Geomet" surface finish.

Protect flange faces from damage and before installing the valve check that all the seals are present. The mating flange face must be of the quality specified in the catalogue.

Before initial start-up, bleed all air from the hydraulic system. Do not use any pipe fittings that have tapered threads.



**Attention:** before removing or disassembling the valve, vent all hydraulic pressure from the system - double check!

### 5.2 Adjustment information

#### Pilot valve for main function

The pilot valve for the lowering function is factory-set during testing to the opening pressure stipulated by the customer and then sealed.

- clockwise → increases the pressure
- counterclockwise → decreases the pressure

The change in pressure is approx. 5.8 bar per turn.



**Attention:** the adjusting screw can be completely unscrewed - it has no end-stop!



**Important:** if the adjustment seal is broken, the warranty is null and void!

#### Pilot valve for pressure-relief function

The pilot valve for the pressure-relief function is factory-set during testing to the pressure stipulated by the customer and then sealed. The pressure is set with flow Q = approx. 0.75 l/min.

- clockwise → increases the pressure
- counterclockwise → decreases the pressure

The change in pressure is approx. 94 bar per turn.  
(with the spring for 320...420 bar)



**Attention:** the adjusting screw can be completely unscrewed - it has no end-stop!



**Important:** if the adjustment seal is broken, the warranty is null and void!

## 6 Description of function

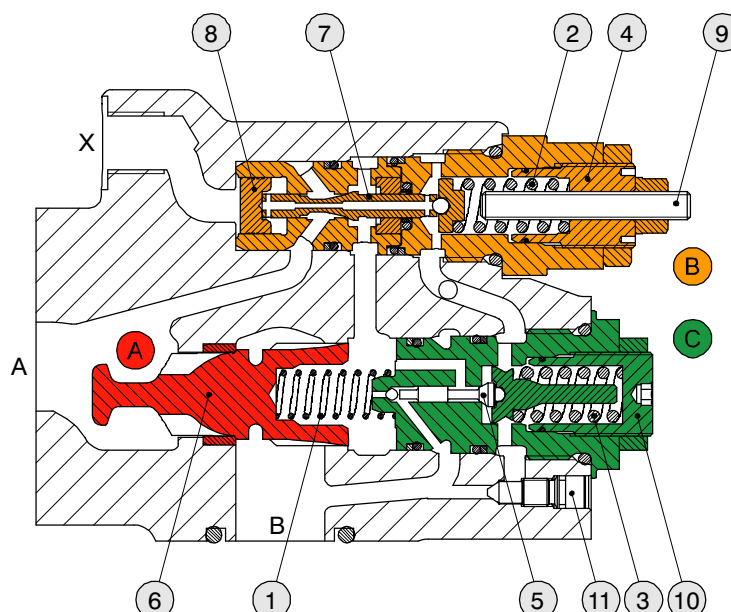


Fig. 1

300-4-10012929

1	CV spring	8	Pilot piston
2	Control spring	9	Stroke limiter
3	Spring for secondary valve	10	Adjusting screw for secondary valve
4	Adjusting screw for pilot valve	11	Emergency-lowering screw
5	Poppet for secondary valve	A	The load-control assembly
6	Control spool	B	Pilot valve for load-control assembly
7	Pilot spool	C	Pilot valve for secondary pressure relief

### The neutral position (load pressure at B; A and X unpressurised)

In the neutral position, the excavator pipe-rupture valve is held closed by the spring (2), which acts on the control spool

(1), and also by the load pressure, which acts on the rear side of the control spool.

### The check-valve function (flow A → B)

To raise the actuator, pump pressure is applied via port A to the valve seat area of the control spool (6) and causes the control spool to open, pushing against the light spring (1).

### The control function (flow B → A)

#### 1. Decompression

The pilot pressure at port X moves the pilot piston (8) in opposition to the springs (2) and the pilot spool (7) opens at the set pressure. The load pressure behind the control spool (6) now decays as it escapes past the pilot spool to port A. The progressive characteristic of the decompression phase ensures that the actuator motion begins smoothly and without jerks.

## 2. Main opening

With further increase in the pilot pressure at X, the pilot spool opens further and the reduced pressure behind the control spool falls still more. The load pressure acting on the differential area of the control spool now pushes the spool off its valve seat in the opening direction until the pressures of the oilflows into, and out of, the control spool have changed enough to produce a situation of force balance.

The pilot pressure acting on the pilot piston therefore controls the open metering area of the control spool, and conse-

quently the flow rate from B → A. The pilot valve is compensated and is unaffected by any back-pressure in port A that may occur.

The opening point of each excavator pipe-rupture valve is precisely matched to the particular make/model of excavator and is set to the required value on the test stand with adjusting screw (4). With the optional stroke limiter (9), the pilot spool stroke can also be restricted. This in turn influences the lowering speed.

### Function of the secondary pressure-relief valve

The pilot valve for the pressure-relief valve is connected directly to actuator port B. When the pressure set with spring (3) is reached, the poppet (5) opens and unloads the rear side of the control spool (6) to port L. The load pressure, acting on the differential area of the control spool, now pushes the spool fully open and opens the B-to-A flow path for the full rated flow. The pilot valve is not connected to the return line and is therefore unaffected by any back-pressure in port A that may occur. With a closed-centre directional valve, no pressure summing occurs with the necessary series-con-

nected downstream pressure-relief valve. The secondary pressure can be set at any desired level with the adjusting screw (10).



**Attention:** when the pilot valve for the secondary pressure relief function opens, there is a pilot flow of 9 l/min per valve to port L. To ensure that the performance characteristics are not affected, the drain line should be sized so that the back-pressure never exceeds 10 bar.

### Leakage-oil drain

The leakage oil from both pilot cartridges as well as their spring chambers is drained to port L. This port should be drained to tank with the least possible back-pressure. Any

tank preload- or back-pressure in the drain line has a 1:1 effect on the opening values of both pilot valves.

### Emergency-lowering screw BL

An optional emergency-lowering screw (11) can be incorporated. The actuator is vented to port L through a  $\varnothing 3$  connecting drilling that is normally shut off. The screw cannot be completely unscrewed.



**Attention:** when emergency lowering has been completed, the screw must be screwed in again to restore the valve's function!

## 7 Port designations

Port	Description
<b>B</b>	Actuator/load port
<b>A</b>	Flow or return port
<b>X</b>	Pilot port
<b>L, L1</b>	Drain port
<b>E, E1</b>	Port for balance pipe in parallel-cylinder applications; protected by a $\varnothing 1$ fixed orifice

## 8 Circuit example

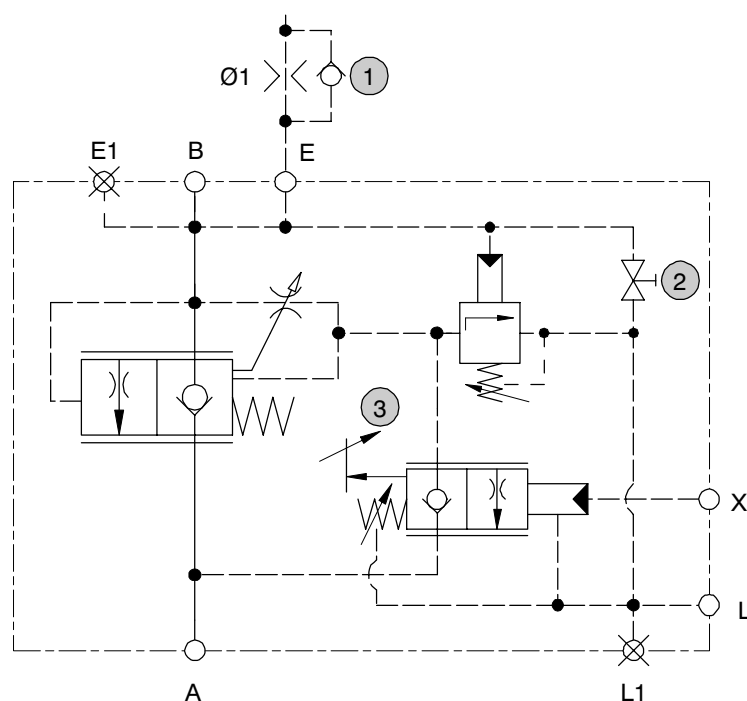


Fig. 2

300-4-10012146

<b>1</b>	Version with optional balance valve
<b>2</b>	Version with optional emergency lowering
<b>3</b>	Version with optional stroke limiter



## 9 Standard design, sizes 16/20

### 9.1 Dimensions

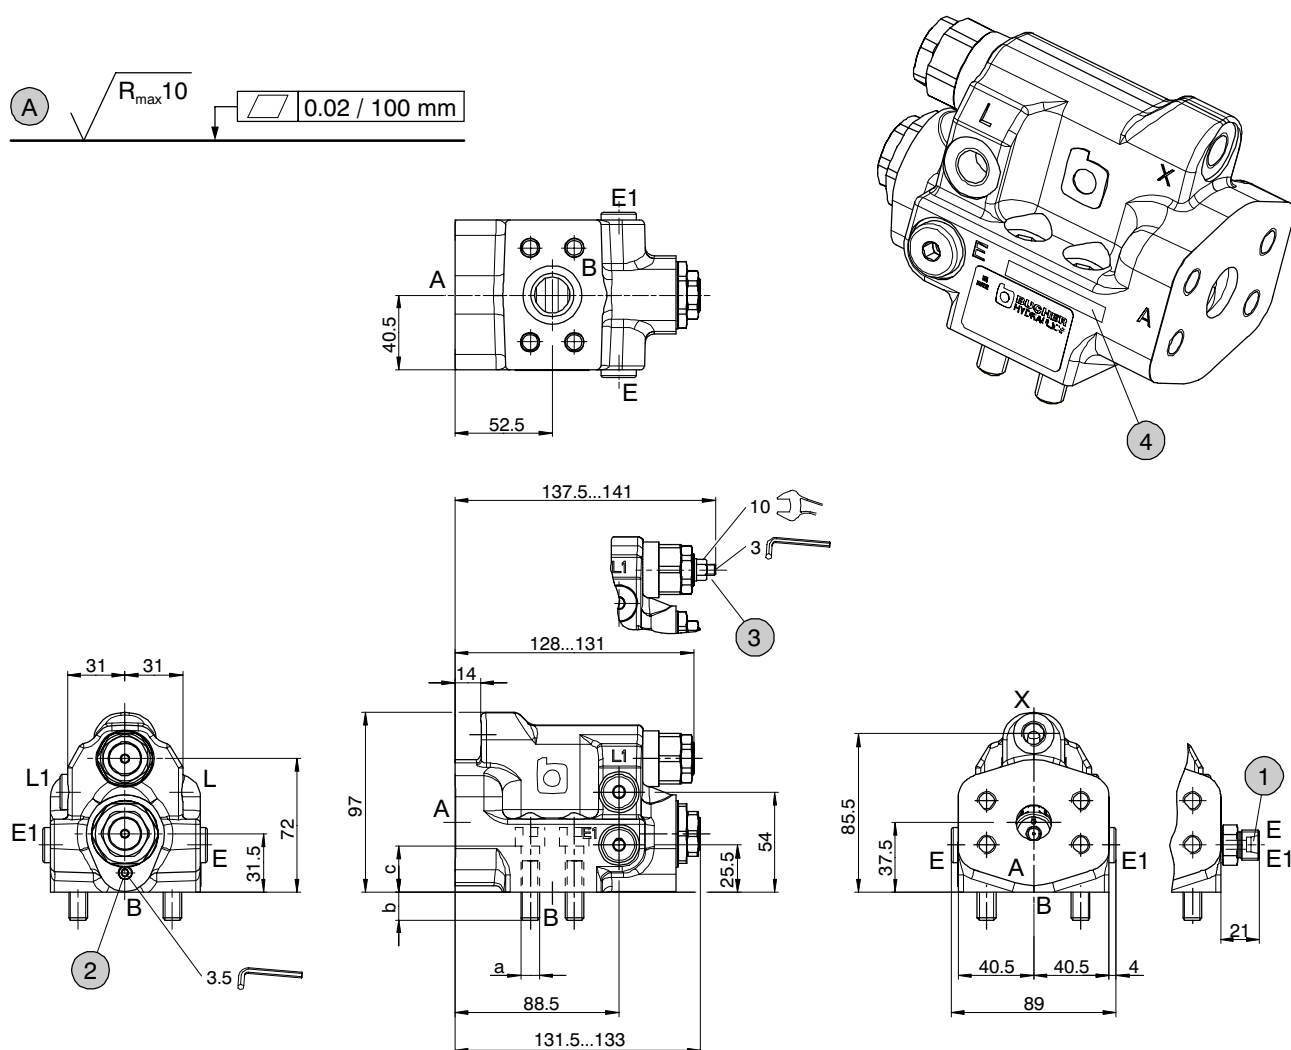


Fig. 3


300-4-10012889

<b>1</b>	Version with optional balance valve Fitting, type 8S, for cutting ring to DIN 3861	<b>3</b>	Version with optional stroke limiter
<b>2</b>	Version with optional emergency lowering	<b>4</b>	Serial number
<b>A</b>	Required quality of the mating surface		


Design	Ports			Dimensions		
	A	B	X, L, L1, E, E1	a	b	c
CFS 16-A	SAE 3/4" 6000 psi	SAE 3/4" 6000 psi	G 1/4"	M10	15	25
CFS 20-A	SAE 1" 6000 psi	SAE 1" 6000 psi	G 1/4"	M12	16	24

## 9.2 Performance graphs


$\Delta p$  A to B =  $f(Q)$

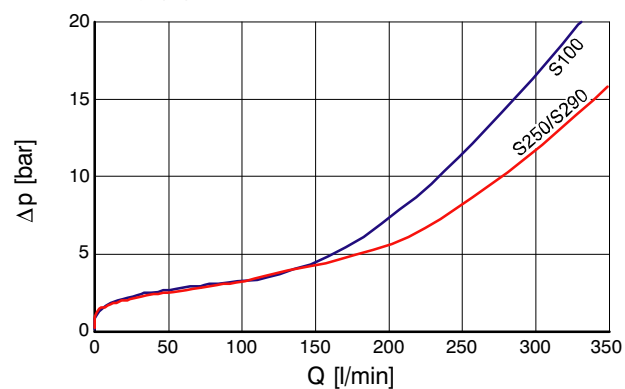


$\Delta p$  B to A =  $f(Q)$

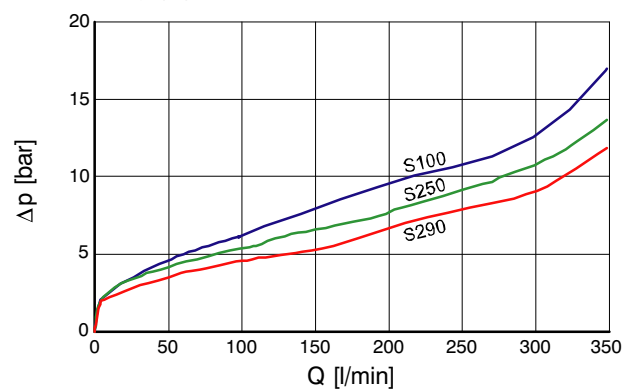

Opening curve,  $Q = f(pX)$  at 33 bar load pressure

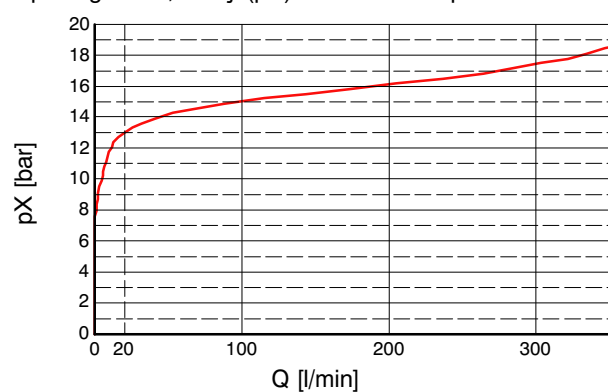


Opening curve,  $Q = f(pX)$  at 100 bar load pressure

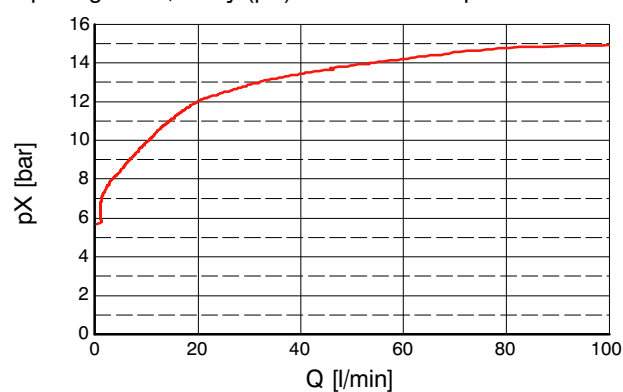

$pX$  = pilot pressure [bar]

Pressure-relief valve, secondary PRV,  $Q = f(\text{Load})$   
(Example curve)

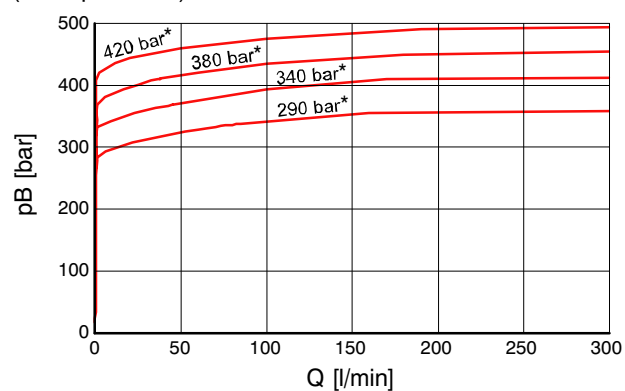

\* pressure setting

