


## Leak-free Pipe-Rupture Valve for Excavators

Series ESV

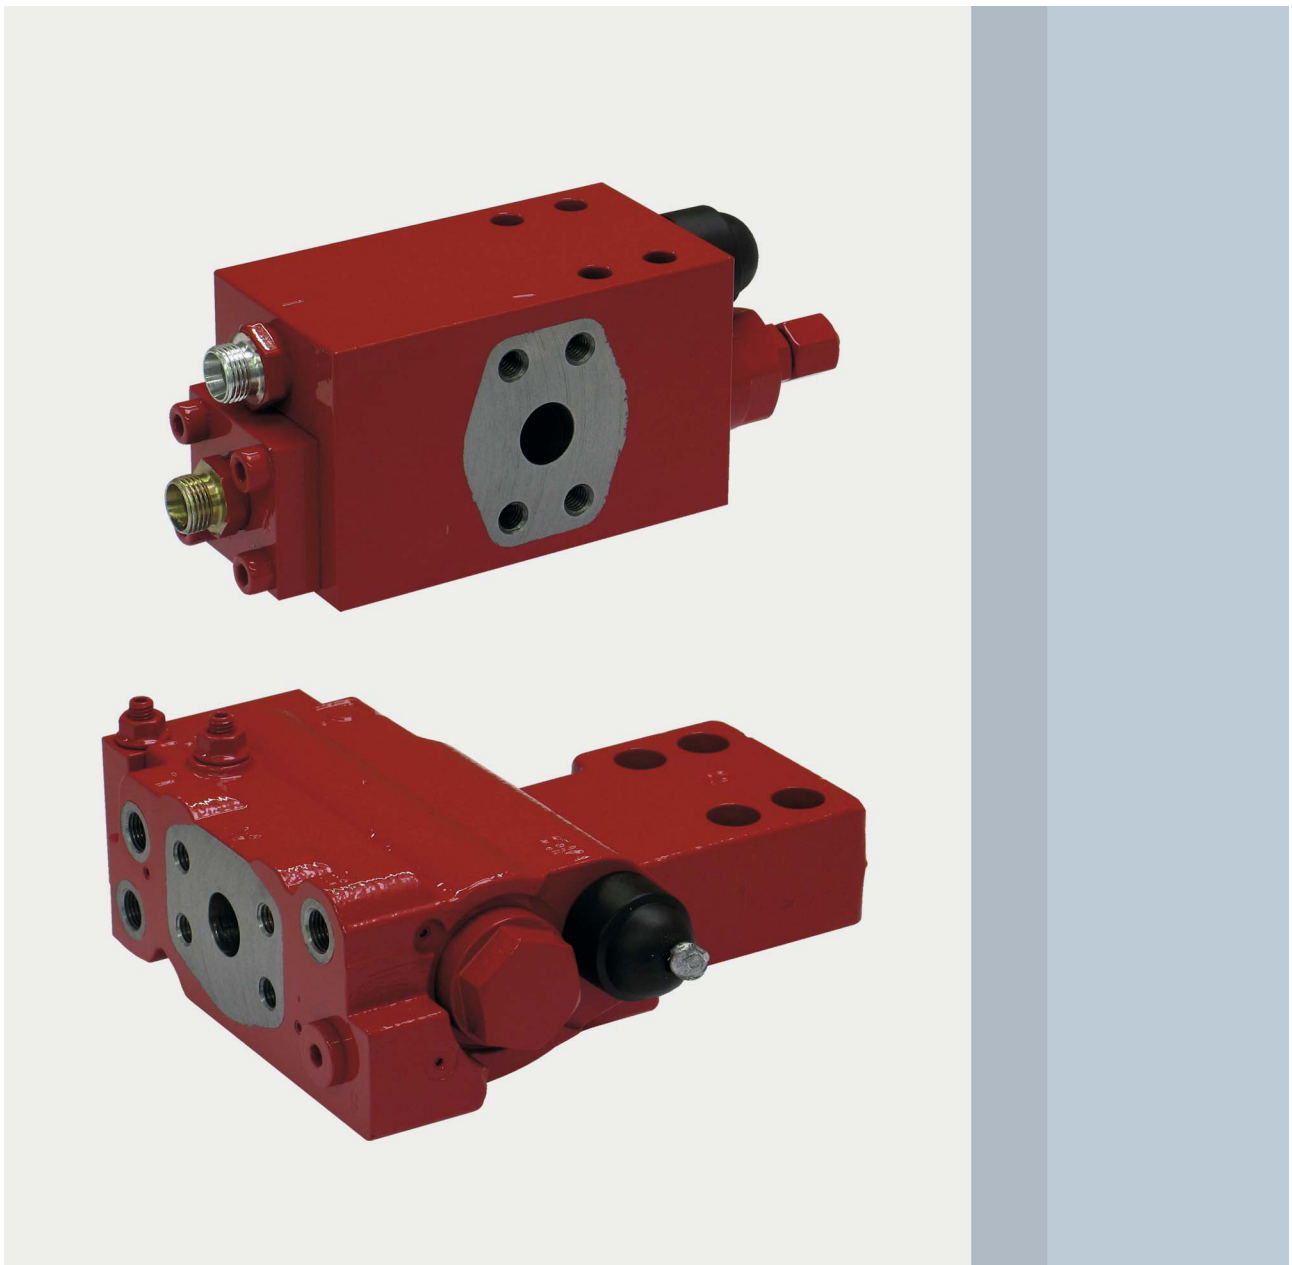

motion and progress

# Contents

## Page

<b>1</b>	<b>General description</b>	<b>3</b>
<b>2</b>	<b>Advantages</b>	<b>3</b>
<b>3</b>	<b>Application</b>	<b>3</b>
<b>4</b>	<b>Technical data</b>	<b>4</b>
<b>5</b>	<b>Installation/startup</b>	<b>5</b>
	5.1 Installation information	5
	5.2 Adjustment information	5
<b>6</b>	<b>Description of function</b>	<b>6</b>
<b>7</b>	<b>Port designations</b>	<b>8</b>
<b>8</b>	<b>Circuit example</b>	<b>8</b>
<b>9</b>	<b>Standard design, sizes 16/20</b>	<b>9</b>
	9.1 Dimensions	9
	9.2 Performance graphs	10
	9.3 Model code	11
<b>10</b>	<b>Standard design, size 25</b>	<b>12</b>
	10.1 Dimensions	12
	10.2 Performance graphs	13
	10.3 Model code	14
<b>11</b>	<b>Flat design, sizes 16/20</b>	<b>15</b>
	11.1 Dimensions	15
	11.2 Performance graphs	16
	11.3 Model code	17

## 1 General description

In accordance with standard EN 474-5 "Safety of earth-moving machinery - Requirements for hydraulic excavators", the excavator pipe-rupture valve, type ESV (**Excavator Safety Valve**), prevents uncontrolled lowering of the actuator in the event of a pipe- or hose-rupture. In addition,

it holds the actuator in its position without any leakage when the main valve is centred. The valve also includes a secondary pressure-relief function, which protects the actuator against overload.

## 2 Advantages

The inlet and actuator ports on the ESV excavator pipe-rupture valve are standard SAE flanged ports, and the valve can therefore be retrofitted to existing equipment without any difficulty.

Thanks to its pilot-operated opening principle and outstanding opening ratio, variations in load pressure - even right up to the maximum - have no effect on the fine-control characteristics and the hydraulic performance.

The ESV is set at the machine in a way that ensures that the excavator pipe-rupture valve has no effect on the hydraulic values that have already been set in the machine (pre-opening principle). This means that excavators with and

without a lifting function can be equipped with the same basic hydraulic system; the machines' work cycles remain unchanged.

The secondary pressure-relief valve that is employed is a pressure-compensated design. Even when the main spool valve is a closed-centre model and a secondary valve is connected in series, no pressure summing occurs. The secondary pressure-relief valve in the excavator pipe-rupture valve opens at exactly the opening pressure that has been set. There is no need for a large-bore, external tank return line.

## 3 Application

The leak-free excavator pipe-rupture valve is used wherever so required by the standards EN 474, ISO 8643 and DIN 24093 for excavators with a lifting device (e.g. a load hook on the bucket). The actuators concerned are the lift cylinder, the stick cylinder and the adjusting cylinder.

It is also possible to envisage other machine applications in which a pipe-rupture on the actuators could produce dangerous situations e.g. machines for materials handling and demolition.



**Attention:** the excavator pipe-rupture valve may only be used for the purpose for which it has been designed!

## 4 Technical data

General characteristics	Description, value, unit
Design	proportionally-controlled seat valve, with initial hydraulic decompression patented follower principle
Mounting method	flange mounting, SAE 6000 psi
Mounting attitude	unrestricted
Flow direction	A → B free flow through check valve B → A controlled flow
Weight	standard design = 6.9 kg flat design = 8.6 kg
Opening ratio	1:113 (seat area of pilot spool, to pilot-piston area)

Hydraulic characteristics	Description, value, unit
Nominal sizes	16, 20 25 other sizes - consult Bucher Hydraulics
Nominal flow rate	size 16 = 250 l/min size 20 = 350 l/min size 25 = 500 l/min
Pilot pressure range	opening pressure min. 4 bar ... max. 9 bar (can be chosen) full opening opening pressure + 14 bar + drain-oil back pressure
Operating pressure	max. 420 bar
Secondary PRV - adjustment range	min. 80 bar ... 420 bar (max. up to 460 bar also possible); settings are sealed
Operating fluid	mineral oil to DIN 51524 and DIN 51525 (HL/ HLP) other fluids - consult Bucher Hydraulics
Temperature range, seal materials	Nitrile = -20 °C ... +90 °C Viton = -20 °C ... +200 °C Low (N7T40) = -50 °C ... +80 °C
Viscosity range	min. 2.8 mm <sup>2</sup> /s (cSt) ... max. 1500 mm <sup>2</sup> /s (cSt) recommended 10 mm <sup>2</sup> /s (cSt) ... 380 mm <sup>2</sup> /s (cSt)
Filtration	NAS 1638 class 9, β <sub>10</sub> ≥ 75 ISO 4406 class 18/15 (valves do not have any internal filters)

Ports	Description, value, unit
SAE	to SAE J518 DEC87
Threads	to DIN 3852, Parts 1 and 2
Fittings	to ISO 8434-1

## 5 Installation/startup

### 5.1 Installation information



**Attention:** only trained and competent personnel may carry out any work on the excavator pipe-rupture valve!

The valve must not be opened without the manufacturer's express permission!

Mounting bolts can be supplied as an optional extra and are grade 12.9 to DIN 912, with "Geomet" surface treatment.

Before initial start-up, bleed all air from the hydraulic system. Do not use any pipe fittings that have tapered threads.



**Attention:** before removing or disassembling the valve, vent all hydraulic pressure from the system - double check!

### 5.2 Adjustment information

#### Pressure-relief valves

Pressure-relief valves are factory-set to the pressure stipulated by the customer and then sealed. The pressure is set with flow  $Q = 0.75 \text{ l/min}$

- Clockwise → increases the pressure
- Counterclockwise → decreases the pressure



**Attention:** the adjusting screw can be completely unscrewed - it has no end-stop!



**Important:** if the adjustment seal is broken, the warranty is null and void!

#### Change in pressure per turn

Basic setting	Sizes 16/20	Size 25
>220 bar	80 bar	100 bar
≤ 220 bar	40 bar	50 bar

## 6 Description of function

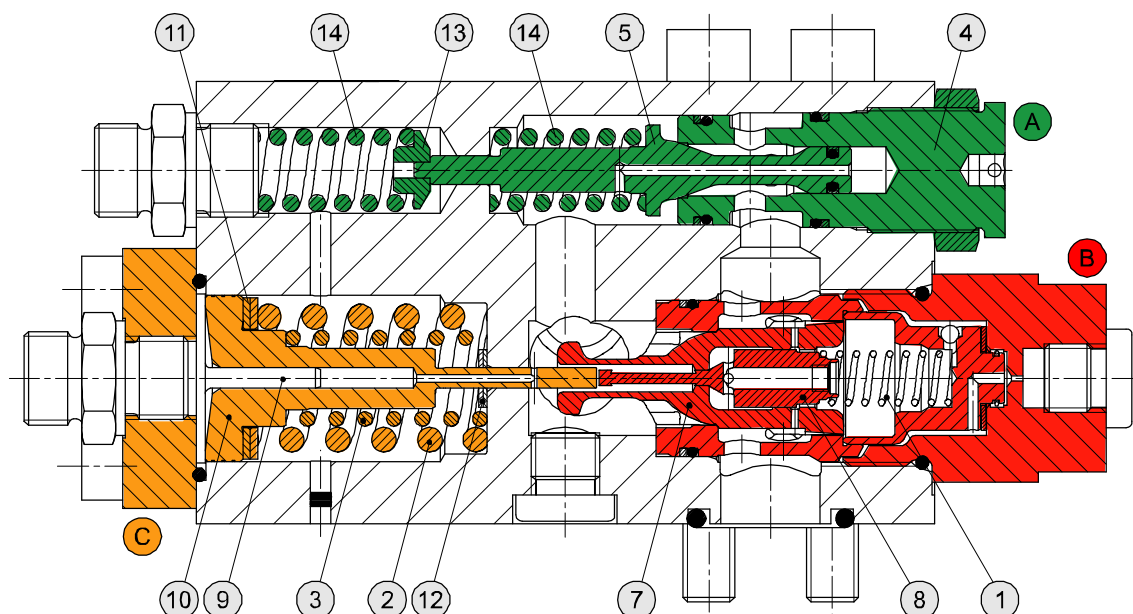


Fig. 1 Sectional view

1	CV spring	10	Pilot piston with compensating drilling
2	Control spring	11	Precision washer
3	Control spring	12	Stroke-limiting washer
4	Adjusting screw for secondary PRV	13	Spring plate
5	Poppet	14	Spring for secondary valve
7	Control spool	A	The secondary valve unit
8	Pilot spool	B	The load-control assembly
9	Compensating pin	C	The pilot control unit

### Neutral position (load press. at B; A + X unpressurised)

In the neutral position, the excavator pipe-rupture valve has zero leakage. The valve is held closed by the spring (1), which acts on the pilot spool (8) and thus on the control

spool (7), and also by the load pressure, which acts on the rear side of the pilot spool and the control spool.

### The check-valve function (flow A → B)

To raise the actuator, pump pressure is applied via port A to the valve-seat area of the control spool (7) and causes the control spool together with the pilot spool (8) to open, push-

ing against the light spring (1). When this check valve operates, the control spool moves in the opening direction but the pilot spool, due to its small effective area, does not open.

### The control function (flow B → A)

#### 1. Decompression

The pilot pressure at port X moves the pilot piston (10) in opposition to the springs (2) and (3) and opens the pilot spool

(8). The load pressure behind the control spool now decays as it escapes past the pilot spool to port A. The progressive characteristic of the decompression phase ensures that the actuator motion begins smoothly and without jerks.

## 2. Main opening

With further increase in the pilot pressure at X, the pilot spool opens further and the reduced pressure behind the control spool falls still more. The load pressure acting on the differential area of the control spool now pushes the spool off its valve seat in the opening direction until the pressures of the oilflows into, and out of, the control spool have changed enough to produce a situation of force balance. The pilot pressure acting on the pilot piston therefore controls the open metering area of the control spool, and consequently the flow rate from B → A. As the control spool opens, the compensating pin (9) dictates that the opening action is completely independent of any back-pressure in port A.

### Function of the secondary pressure-relief valve

The secondary pressure-relief valve is connected directly to actuator port B. When the pressure setting is reached, the poppet (5) lifts and opens a connection to the return-line port A. This path is sized for the full nominal flow rate. The poppet is pressure balanced, so that forces resulting from back-pressure in the return line cancel each other out. This means that the opening point of the pressure-control valve is independent of the back-pressure in the port A i.e. with a closed-centre directional valve, no pressure summing oc-

### Leakage-oil drain

The spring chambers of the pilot piston and the secondary pressure-relief valve are drained to port L. This port should be drained to tank with the least possible back-pressure.

### Emergency-lowering feature

The standard ESV design does not have an emergency-lowering feature.

### Emergency lowering B → L

In the flat ESV design, a mechanical emergency-lowering screw is incorporated. The actuator is vented to port L through a  $\varnothing 4$  connecting drilling that is normally shut off.

### Air-bleeding (optional)

The pilot piston includes a  $\varnothing 0.35$  drilling for the permanent, automatic bleeding of any air in the pilot circuit to drain port L. There is a permanent flow of oil from X to L.

### Air-bleeding X → L (optional)

An air-bleed screw is also available for the flat valve design. The pilot line is vented to port L through a connecting drilling that is normally shut off. When emergency lowering has

### Accumulator port (optional)

As an option, the flat valve design can be provided with an additional accumulator port. The port also has an M5 thread

The opening point of each pipe-rupture valve is precisely matched to the particular make/model of excavator and is set to the required value on the test stand with precision washers (11). Using stroke-limiting washers (12), the pilot piston stroke can also be restricted. This in turn influences the lowering speed.

During the lowering motion, and while the pilot pressure is kept constant, the constantly changing geometry can result in a steadily increasing load pressure. In this situation, from approx. 100 bar load pressure the valve begins to function like a compensated 2-way flow controller.

curs with the necessary downstream pressure-relief valve. The secondary pressure can be set at any desired level with the adjusting screw (4). For basic settings  $\leq 220$  bar, the second compression spring (13) and the spring plate (14) are not fitted. This results in improved resolution at lower pressure settings.

As an option, the valves can be provided with a separate external tank port.

Any tank back-pressure at port L has a 1:1 effect on the opening values of both main functions.

When emergency lowering has been completed, the screw must be screwed in again to restore the valve's function!

been completed, the screw must be screwed in again to restore the valve's function!

for an orifice to provide the port with a minimum level of protection.

## 7 Port designations

Port	Description
<b>B</b>	Actuator/load port
<b>A, A1</b>	Flow or return ports (the flat design has only one A port)
<b>X</b>	Pilot port
<b>L</b>	Drain port
<b>E</b>	Port for balance pipe in parallel-cylinder applications; protected by a $\varnothing 1$ fixed orifice
<b>MB</b>	Gauge port for the actuator/load pressure <ul style="list-style-type: none"> <li>• MB is not available on standard models in parallel applications; it is used as the E port</li> <li>• Is separately drilled in the flat design</li> </ul>
<b>T (consult Bucher)</b>	Port for a possible external secondary PRV tank return line
<b>S (consult Bucher)</b>	Special port for the actuator/load pressure (available as an option, and only for the flat design) <ul style="list-style-type: none"> <li>• Port for overload warning device</li> <li>• Port for accumulator</li> <li>• Optionally, can be fitted with an orifice</li> </ul>

## 8 Circuit example

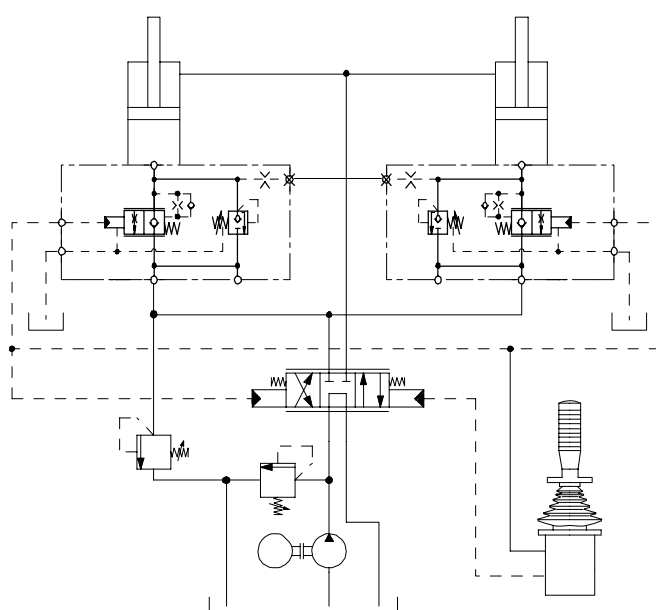


Fig. 2 Circuit example



## 9 Standard design, sizes 16/20

### 9.1 Dimensions

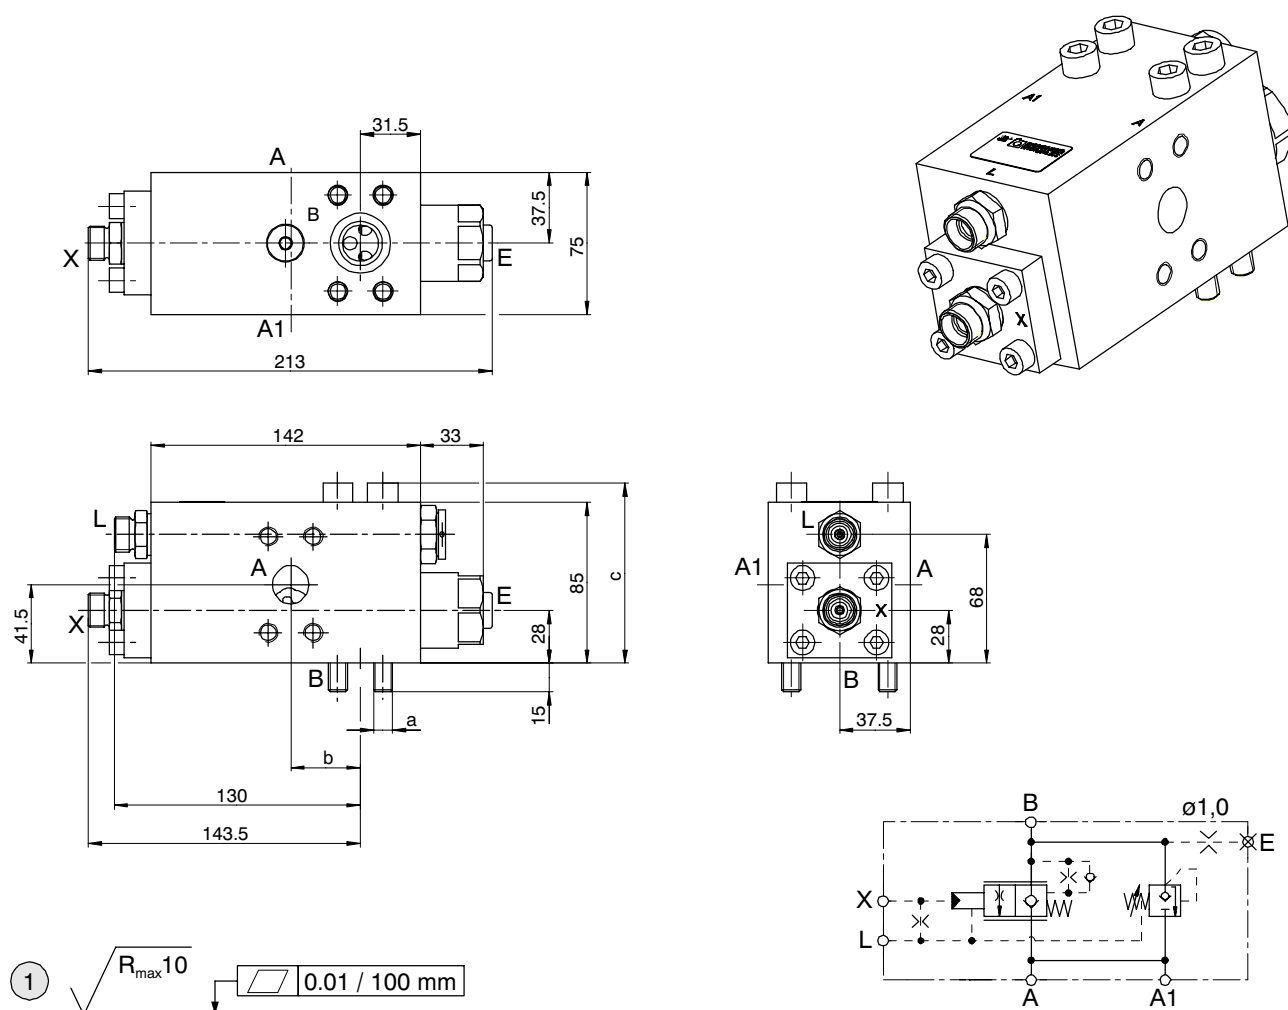


Fig. 3 Dimensions of ESV 16-B-S / ESV 20-B-S

300-4-10012916


1 Required quality of the mating surface

Design	Ports					O-ring Port B
	A, A1	B	E (MB)	L	X	
ESV 16-B-S	SAE 3/4" 6000 psi	SAE 3/4" 6000 psi	G 1/4" (GE 8 PSR)	EO GE 12 PLM-ED (M18x1.5)	EO GE 12 PLM-ED (M16x1.5)	3.53 x 24.99
ESV 20-B-S	SAE 1" 6000 psi	SAE 1" 6000 psi	G 1/4" (GE 8 PSR)	EO GE 12 PLM-ED (M18x1.5)	EO GE 12 PLM-ED (M16x1.5)	5.53 x 32.92


Design	Dimensions [mm]		
	a	b	c
ESV 16-B	M10	36.8	95
ESV 20-B	M12	43	97

## 9.2 Performance graphs


$\Delta p$  A to B =  $f(Q)$

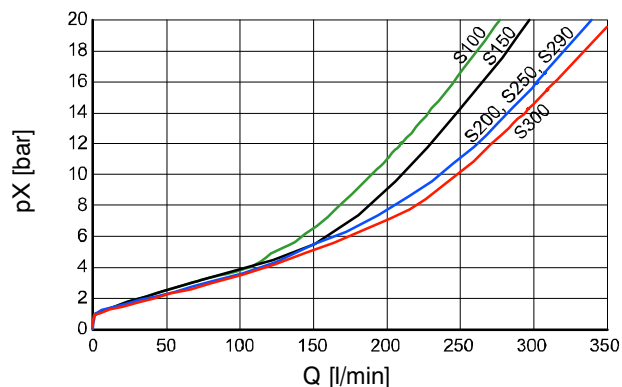

$\Delta p$  B to A =  $f(Q)$

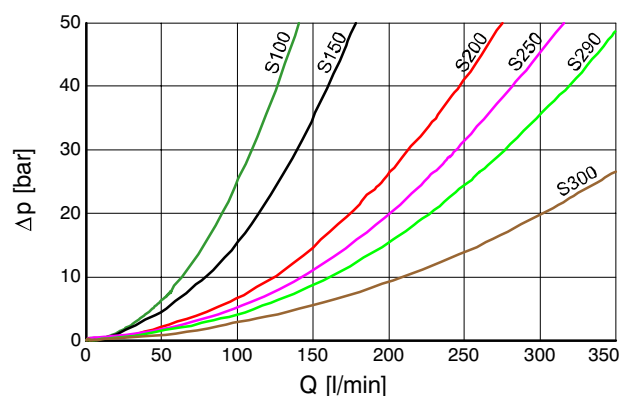


Pressure-relief valve, secondary PRV,  $Q = f(\text{Load})$   
(Example curve)

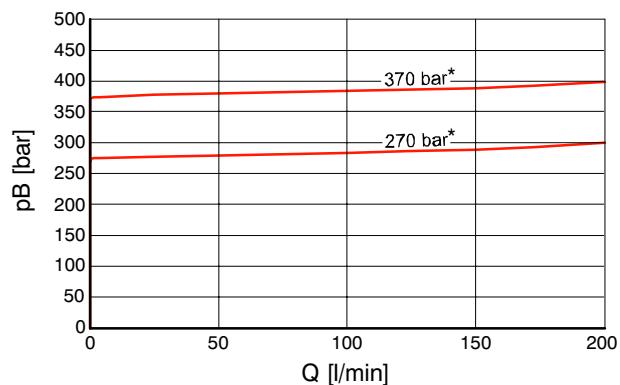

\* pressure setting

Opening pilot press. X from B to A,  $Q = f(pX)$  at 33 bar load

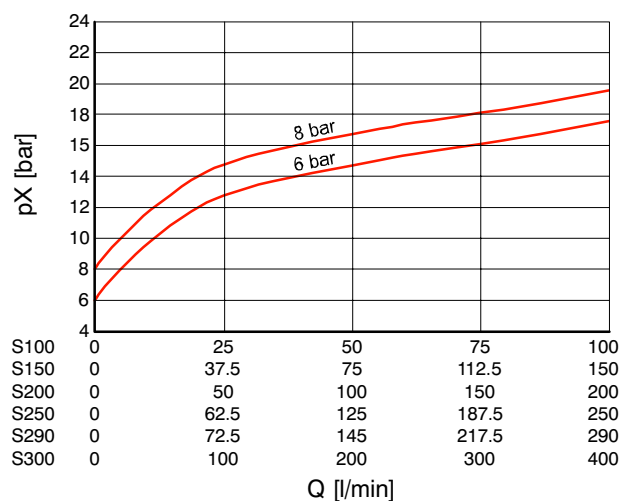

S100	0	25	50	75	100
S150	0	37.5	75	112.5	150
S200	0	50	100	150	200
S250	0	62.5	125	187.5	250
S290	0	72.5	145	217.5	290
S300	0	100	200	300	400

### 9.3 Model code

ESV - [ ] - B - S [ ] [ ] - [ ] - [ ] - SV - [ ] - [ ] - [ ] - [ ] - [ ]	
<b>Nominal size</b>	
size 16	= 16
size 20	= 20
<b>Version</b>	
B	= B
<b>Design</b>	
standard design	= S
<b>Seal material</b>	
	Temperature range
Nitrile (standard)	-20°C to +90 °C = N
Nitrile (low temperature)	-50°C to +80 °C = T
Viton	-20°C to +200 °C = V
<b>Mounting bolts</b>	
without mounting bolts	= O
with surface-treated mounting bolts	= D
<b>Control spool</b>	
Q at approx.. 33 bar $\Delta p$ B → A	Size 16      Size 20
100 l/min.	= S100      = S100
150 l/min.	= S150      = S150
200 l/min.	= S200      = S200
250 l/min.	= S250      = S250
290 l/min.	= S290
300 l/min.	= S300
<b>Start of opening</b>	
Opening pressure ... bar	= ... [bar]
<b>Secondary pressure relief</b>	
Pressure relief from B	=
<b>Pressure setting</b>	
Pressure setting ... bar at approx. 0.75 l/min.	= ... [bar]
<b>Ports X, L, E</b>	
(standard) with fittings in X and L (E=VSTI)	= V
with fittings in X, L and E	= R
<b>Inlet port</b>	
port A	= A
portA1	= A1
port2A	= 2A
<b>Optional stroke-limiting</b>	
e.g. 1.2 mm of stroke-limiting (shims)	= H12
<b>Option (consult Bucher Hydraulics)</b>	
external tank port, G <sup>3/4</sup> *	= T

\* only possible with type A inlet port

## 10 Standard design, size 25

### 10.1 Dimensions

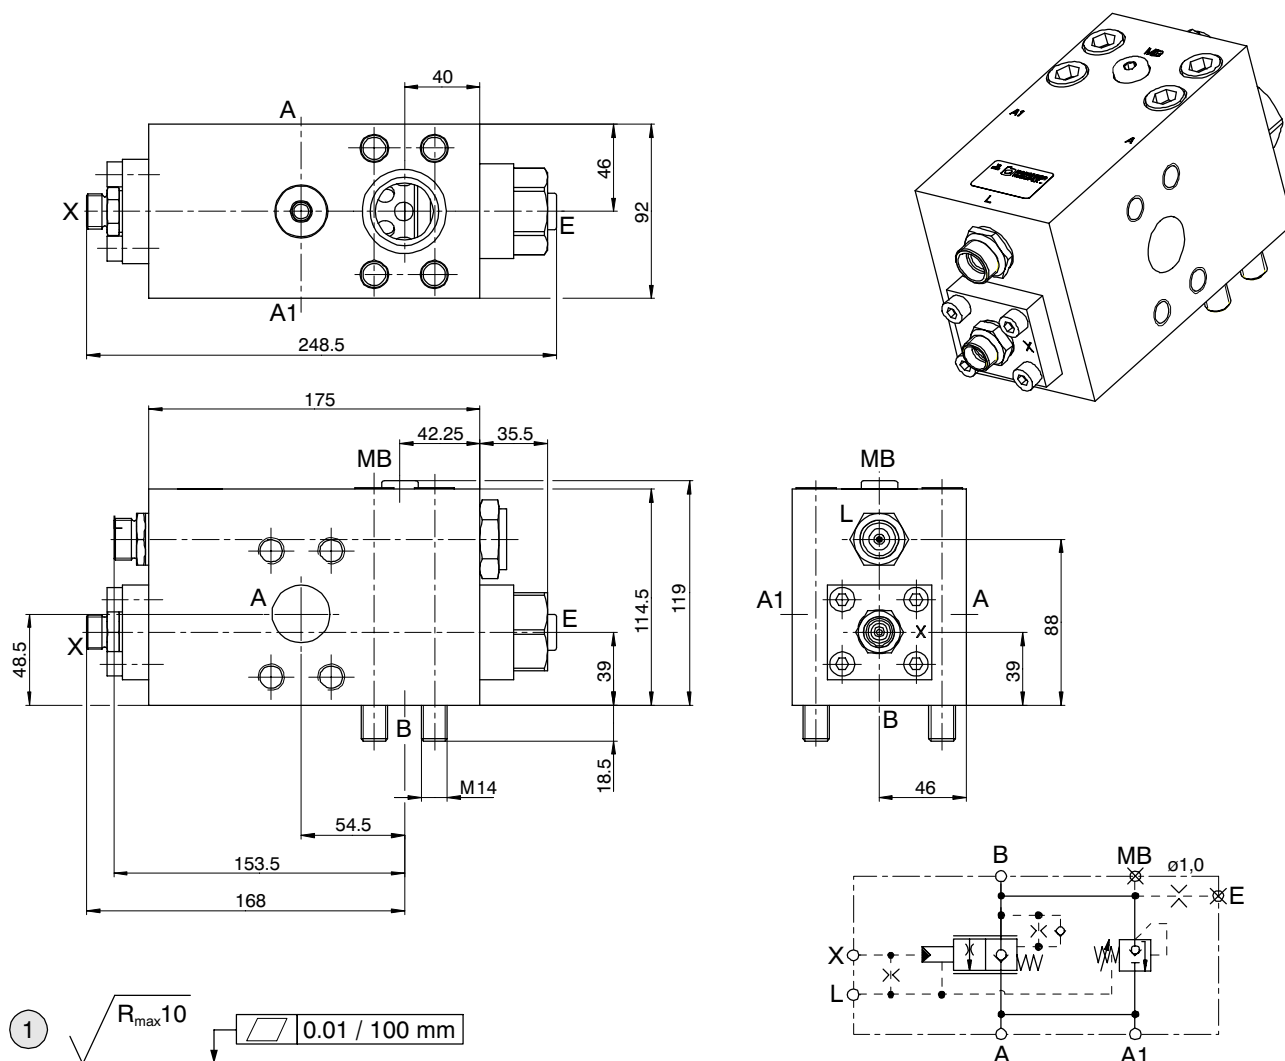


Fig. 4


300-4-10012913

1 Required quality of the mating surface


Design	Ports					O-ring Port B
	A, A1	B	E/MB	L	X	
ESV 25-B	SAE 1 1/4" 6000 psi	SAE 1 1/4" 6000 psi	G 1/4" (GE 8 PSR)	GE 15 PLM-ED (M22x1.5)	GE 12 PLM-ED (M16x1.5)	3.53 x 37.69

## 10.2 Performance graphs


$\Delta p$  A to B =  $f(Q)$

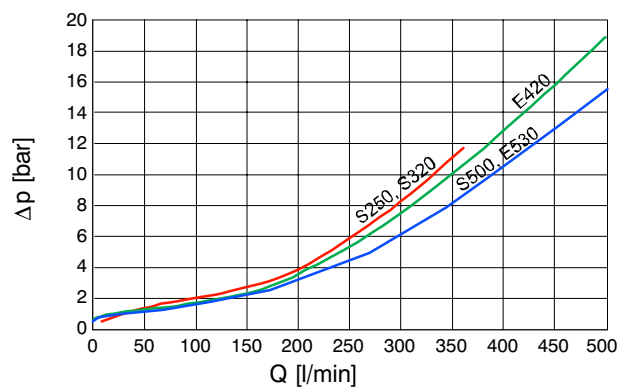

$\Delta p$  B to A =  $f(Q)$

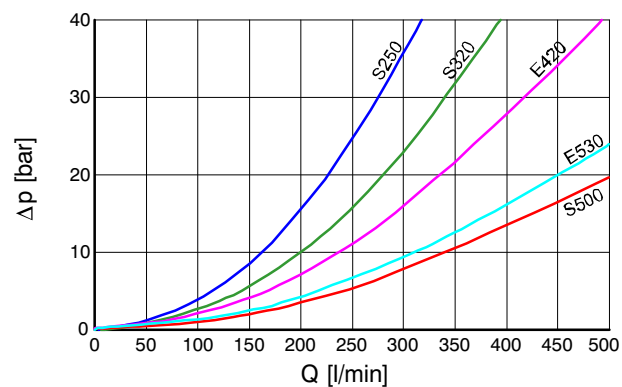


Pressure-relief valve, secondary PRV,  $Q = f(\text{Load})$   
(Example curve)

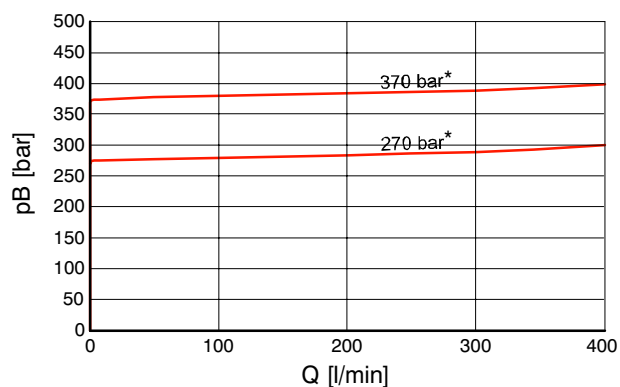

\* pressure setting

Example curve = setting

Opening pilot press. X from B to A,  $Q = f(p_X)$  at 33 bar load

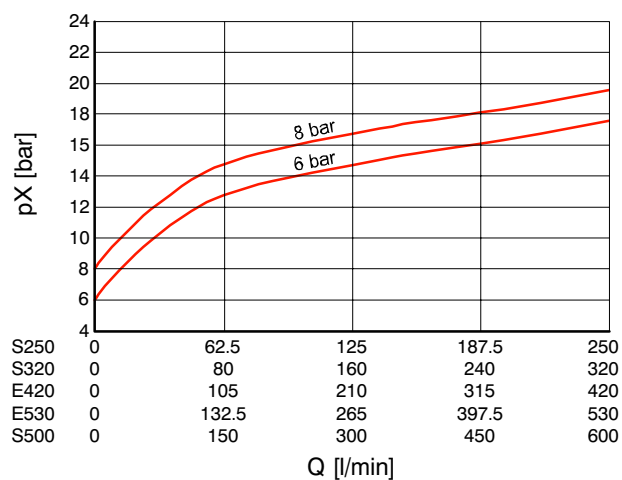

S250	0	62.5	125	187.5	250
S320	0	80	160	240	320
E420	0	105	210	315	420
E530	0	132.5	265	397.5	530
S500	0	150	300	450	600

## 10.3 Model code

		<div style="display: flex; align-items: center; gap: 5px;"> <div style="border: 1px solid black; padding: 2px 5px;">ESV</div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div>-</div> <div style="border: 1px solid black; padding: 2px 5px;">B</div> <div>-</div> <div style="border: 1px solid black; padding: 2px 5px;">S</div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div>-</div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div>-</div> <div style="border: 1px solid black; padding: 2px 5px;">SV</div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div>-</div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div>-</div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div>-</div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> </div>									
<b>Nominal size</b>											
size 25		= 25									
<b>Version</b>											
B		= B									
<b>Design</b>											
standard design		= S									
<b>Seal material</b>											
Nitrile (standard)		Temperature range									
		-20°C to +90 °C		= N							
Nitrile (low temperature)		-50°C to +80 °C		= T							
Viton		-20°C to +200 °C		= V							
<b>Mounting bolts</b>											
without mounting bolts		= O									
with surface-treated mounting bolts		= D									
<b>Control spool</b>											
Q at approx. 33 bar $\Delta p$ B $\rightarrow$ A		Size 25									
250 l/min.		= S250									
320 l/min.		= S320									
400 l/min.		= S400									
420 l/min.		= (E420)									
500 l/min.		= S500									
530 l/min.		= (E530)									
<b>Start of opening</b>											
Opening pressure ... bar		= ... [bar]									
<b>Secondary pressure relief</b>											
Pressure relief from B		=									
<b>Pressure setting</b>											
Pressure setting ... bar at approx. 0.75 l/min.		= ... [bar]									
<b>Ports X, L, E</b>											
(standard) with fittings in X and L (E=VSTI)		= V									
with fittings in X, L and E		= R									
<b>Optional stroke-limiting</b>											
e.g. 1.2 mm of stroke-limiting (shims)		= H12									
<b>Inlet port</b>											
port A		= A									
portA1		= A1									
port2A		= 2A									
<b>Option (consult Bucher Hydraulics)</b>											
external tank port, G <sup>3</sup> / <sub>4</sub>		= T									

# 11 Flat design, sizes 16/20

## 11.1 Dimensions

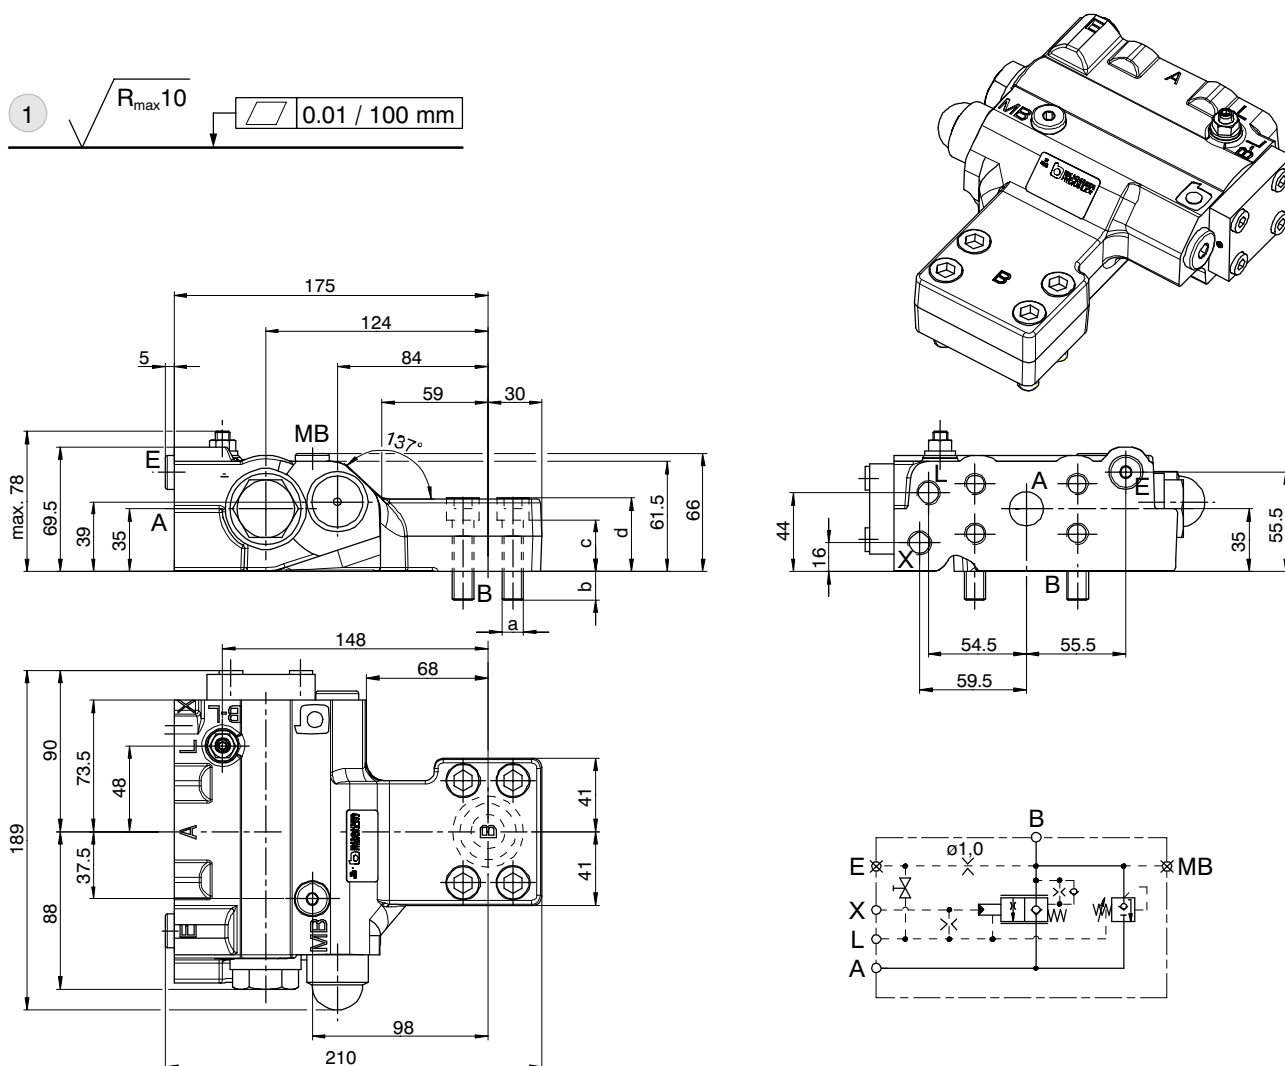


Fig. 5 Dimensions of ESV 16-B-F/ESV 20-B-F

300-4-10012911


1 Required quality of the mating surface

Design	Ports					O-ring Port B
	A	B	E	L	X	
ESV 16-B	SAE 3/4" 6000 psi	SAE 3/4" 6000 psi	G 1/4"	G 1/4"	G 1/4"	3.53 x 24.99
ESV 20-B	SAE 1" 6000 psi	SAE 1" 6000 psi	G 1/4"	G 1/4"	G 1/4"	5.53 x 32.92


Design	Dimensions [mm]			
	a	b	c	d
ESV 16-B	M10	15.5	29.5	40.5
ESV 20-B	M12	16	29	41

## 11.2 Performance graphs


$\Delta p$  A to B =  $f(Q)$

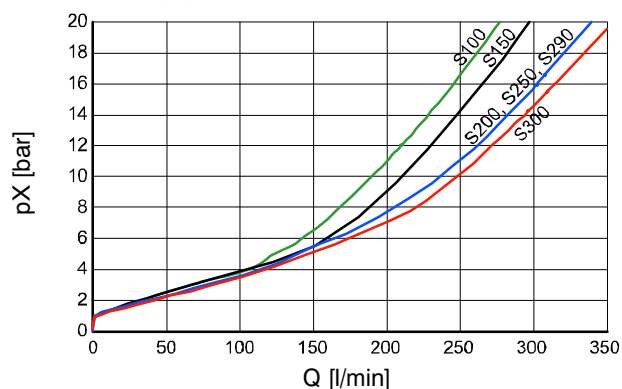

$\Delta p$  B to A =  $f(Q)$

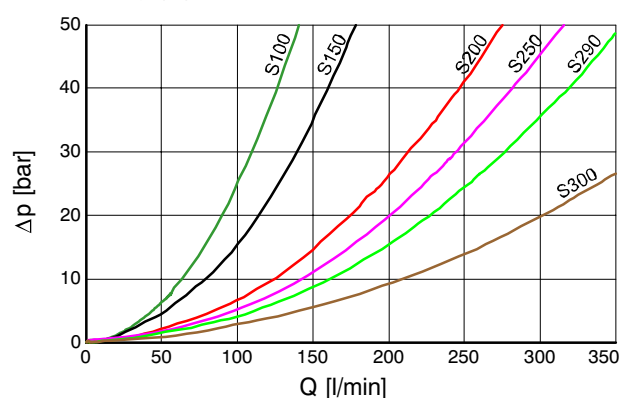


Pressure-relief valve, secondary PRV,  $Q = f(\text{Load})$   
(Example curve)

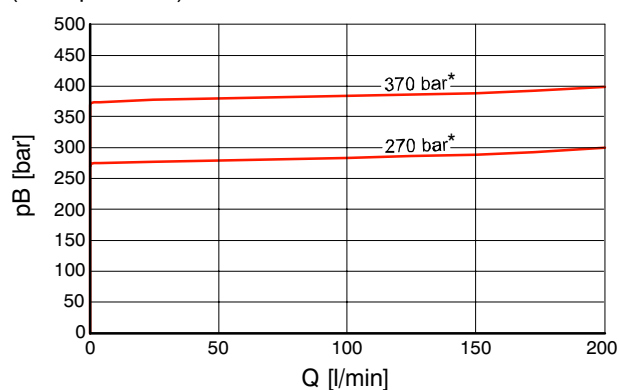

\* pressure setting

Opening pilot press. X from B to A,  $Q = f(pX)$  at 33 bar load

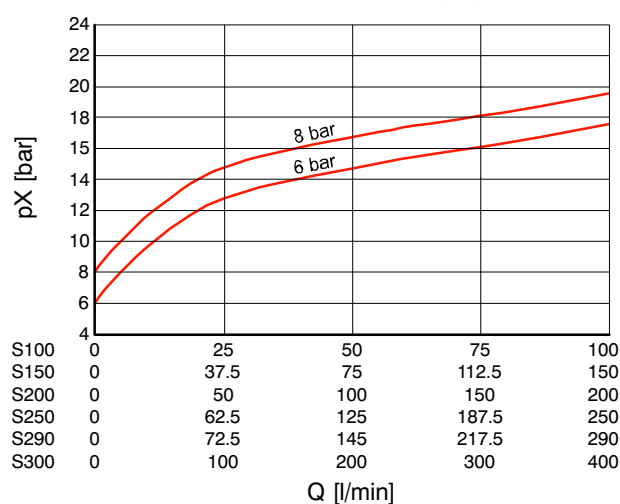

S100	0	25	50	75	100
S150	0	37.5	75	112.5	150
S200	0	50	100	150	200
S250	0	62.5	125	187.5	250
S290	0	72.5	145	217.5	290
S300	0	100	200	300	400



## 11.3 Model code

		<div style="border: 1px solid black; padding: 2px; display: inline-block;">ESV</div> - <div style="border: 1px solid black; width: 20px; height: 20px; display: inline-block;"></div> - <div style="border: 1px solid black; padding: 2px; display: inline-block;">B</div> - <div style="border: 1px solid black; padding: 2px; display: inline-block;">F</div> <div style="border: 1px solid black; width: 20px; height: 20px; display: inline-block;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; display: inline-block;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; display: inline-block;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; display: inline-block;"></div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">SV</div> - <div style="border: 1px solid black; width: 20px; height: 20px; display: inline-block;"></div> - <div style="border: 1px solid black; width: 20px; height: 20px; display: inline-block;"></div> - <div style="border: 1px solid black; width: 20px; height: 20px; display: inline-block;"></div> - <div style="border: 1px solid black; width: 20px; height: 20px; display: inline-block;"></div>									
<b>Nominal size</b>											
size 16	= 16										
size 20	= 20										
<b>Version</b>											
B	= B										
<b>Design</b>											
flat design	= F										
<b>Seal material</b>											
	Temperature range										
Nitrile (standard)	-20°C to +90 °C	= N									
Nitrile (low temperature)	-50°C to +80 °C	= T									
Viton	-20°C to +200 °C	= V									
<b>Mounting bolts</b>											
without mounting bolts	= O										
with surface-treated mounting bolts	= D										
<b>Control spool</b>											
Q at approx. 33 bar $\Delta p$ B $\rightarrow$ A	Size 16	Size 20									
100 l/min.	= S100	= S100									
150 l/min.	= S150	= S150									
200 l/min.	= S200	= S200									
240 l/min.	= S240	= S240									
250 l/min.	= S250	= S250									
290 l/min.		= S290									
300 l/min.		= S300									
<b>Start of opening</b>											
Opening pressure ... bar	= ... [bar]										
<b>Secondary pressure relief</b>											
Pressure relief from B	=										
<b>Pressure setting</b>											
Pressure setting ... bar at approx. 0.75 l/min.	= ... [bar]										
<b>Optional stroke-limiting</b>											
e.g. 1.2 mm of stroke-limiting (shims)	= H12										
<b>Optional ports</b>											
accumulator port G <sup>1/4</sup>	= S										
tank port G <sup>3/4</sup>	= T										
<b>Option</b>											
mechanical air-bleeding	= E										

info.nh@bucherhydraulics.com

www.bucherhydraulics.com

© 2006 by Bucher Hydraulics AG, CH-6345 Neuheim.

All rights reserved.

Data is provided for the purpose of product description only, and must not be considered as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.